Copper Press
Plug In Female Adaptor (M-Profile)
MCP 50



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Technical Data

- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards


- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

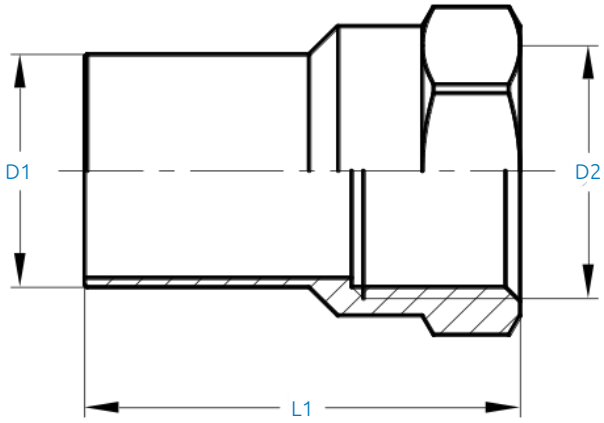

Product Codes and Dimensions (mm)

Product Code	D1	D2	L1
28141	15	½"	44
28142	22	½"	46
28143	22	¾"	46.5
28149	35	1"	54
28148	54	2"	71