Copper Press 45° M x F Bend (M-Profile)

MCP 13



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Technical Data

- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards


- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

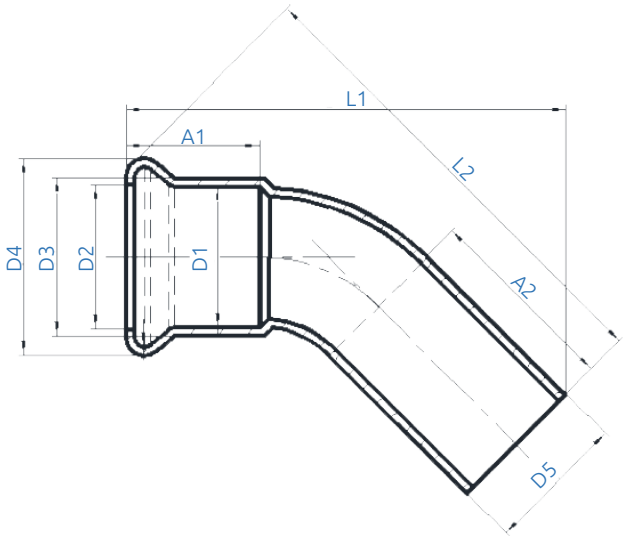

Product Codes and Dimensions (mm)

Product Code	D1	D2	D3	D4	D5	A1	A2	L1	L2
27820	15	15.6	18	23	15	19	22	57.5	62
27821	22	22.8	25	31.3	22	20	23	69.5	74.5
27822	28	28.8	31	37.4	28	20	25	80	86
27823	35	35.7	38.3	44.7	35	28	25	86	90.5
27824	42	42.8	45.3	53.5	42	29	32	103	109
27825	54	54.8	57.3	65.3	54	34	37	123	129
27826	67	69.1	71.7	82.6	67	49	52	177	178
27827	76	78.6	81.1	94.4	76	49	52	184	193
27829	108	110.9	113.8	132.1	108	65	68	253	267