Copper Press Reducing Coupler (M-Profile)

MCP 04



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Technical Data

- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards


- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

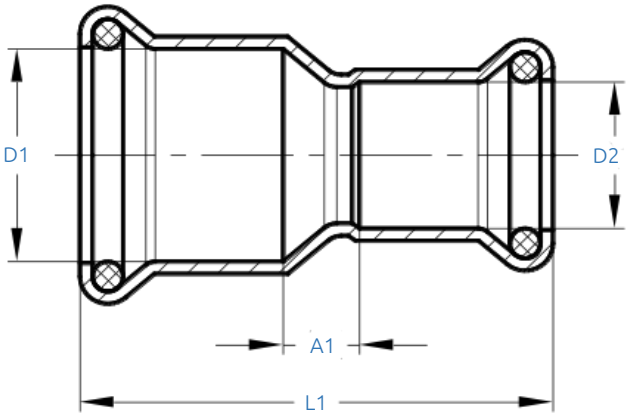

Product Codes and Dimensions (mm)

Product Code	D1	D2	L1	A1
27900	22	15	50	8.5
27901	28	15	55	12
27902	28	22	52	8
27903	35	22	61	14
27904	35	28	60	10
27905	42	22	70	19
27906	42	28	67.5	14.5
27907	42	35	68	10.5
27908	54	28	81	23
27909	54	35	81	19
27910	54	42	81	14