Copper Press Female Union - Conical Seal (M-Profile)

MCP 69



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Technical Data


- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards

- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE
5	Nut	Brass

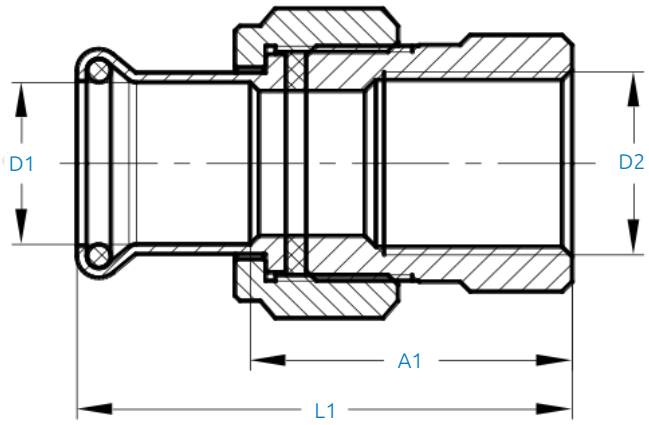

Product Codes and Dimensions (mm)

Product Code	D1	D2	L1	A1
28190	15	½"	43	26
28192	22	¾"	49.5	28.5
28195	28	1"	56	33
28196	35	1 ¼"	73.5	47.5
28197	42	1 ½"	67	37
28198	54	2"	77	42