
Copper Press Slip Coupler (M-Profile)

MCP 05

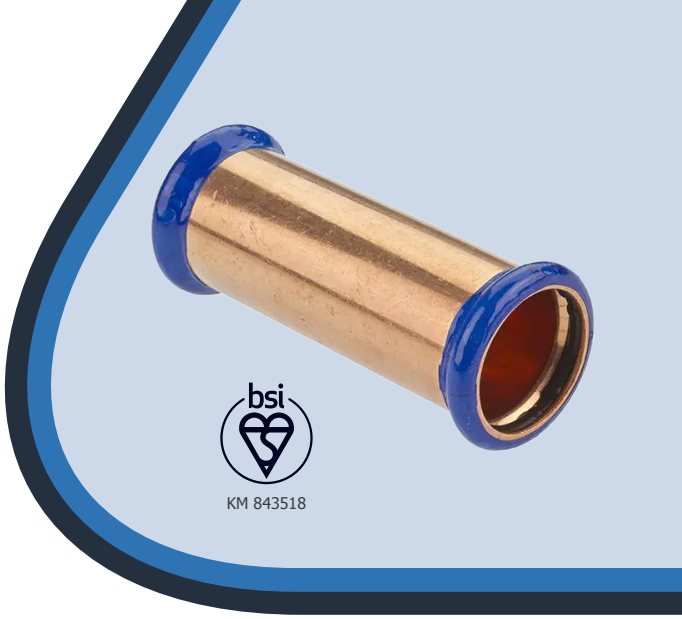

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Technical Data


- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards

- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

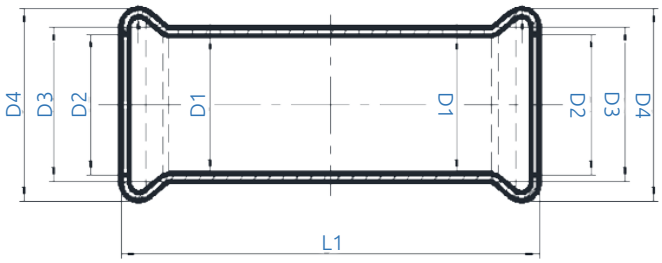

Product Codes and Dimensions (mm)

Product Code	D1	D2	D3	D4	L1
27950	15	15.6	18	23	80
27951	22	22.8	25	31.3	84
27952	28	28.8	31	37.4	91
27953	35	35.7	38.3	44.7	95
27954	42	42.8	45.3	53.5	115
27955	54	54.8	57.3	65.3	139
27956	67	69.1	71.7	82.6	220
27957	76	78.6	81.1	94.4	230