Copper Press Male Iron Adaptor (M-Profile)

MCP 45



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Technical Data

- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards


- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

Brymec 25 Year Warranty

WRAS APPROVED PRODUCT

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

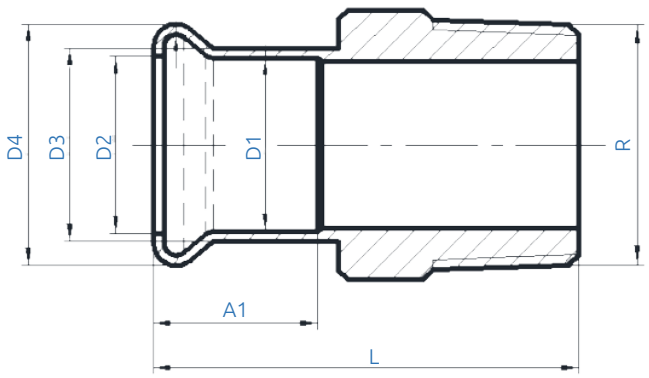

Product Codes and Dimensions (mm)

Product Code	D1	D2	D3	D4	A1	L	R
28115	15	15.6	18	23	19	37	⅜"
28116	15	15.6	18	23	19	39	½"
28117	15	15.6	18	23	19	40	¾"
28118	22	22.8	25	31.3	20	41	½"
28119	22	22.8	25	31.3	20	41	¾"
28120	22	22.8	25	31.3	20	46	1"
28121	28	28.8	31	37.4	22	46	¾"
28122	28	28.8	31	37.4	22	46	1"
28125	35	35.7	38.3	44.7	25	53	1 ¼"
28128	42	42.8	45.3	53.5	29	58	1 ½"
28130	54	54.8	57.3	65.3	34	65	2"
28131	67	69.1	71.7	82.6	48	103	2 ½"
28133	76	78.6	81.1	94.4	49	101	3"