Brymec

Copper Press 90° M x F Bend (M-Profile)

MCP 12



KM 843518

Features and Benefits

- BSI Kitemark Awarded to BS EN 1254-7
- Press-Sure System to ensure complete joint formation
  - Engineered Leak Path Technology
  - Visual Press Indicator Foils
- Friction Fit
- 100% lead-free system
- WRAS approved
- Durable, Secure Leak-Tight Joint
- Flame-Free Installation
- Faster, More Efficient Installation
- 25-Year Warranty
- BIM Files available

Brymec 25 Year Warranty


WRAS APPROVED PRODUCT

Technical Data

- Maximum Working Pressure 16 Bar
- Maximum Operating temperature 99°C
- "M" profile press jaws or slings
- Approved tools include Novapress, REMS, Rothenberger and Ridgid

Applicable Standards

- WRAS approved
- For use with BS EN 1057:2006 copper tube equivalent to Table X
- BSI Kitemark awarded to BS EN 1254-7

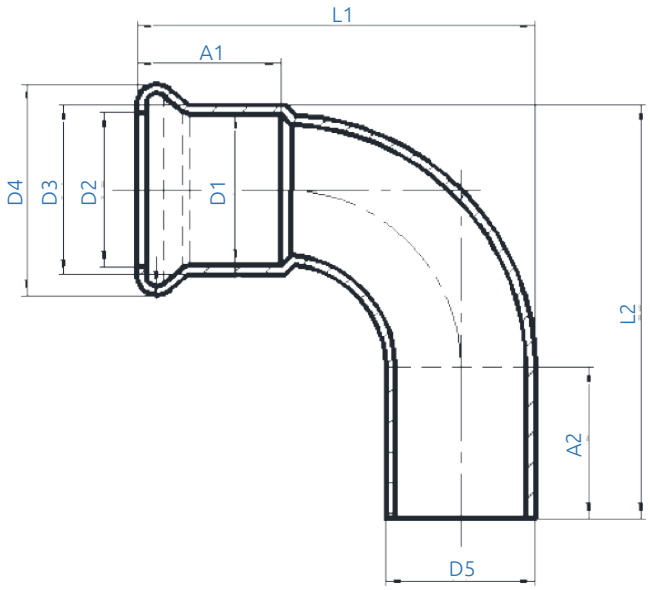

Material Specifications

NO	Description	Materials
1	Body	Cu-DHP (CW024A)
2	Crimp indicator film	PVC, Blue
3	O-Ring	EPDM
4	Dust Cap	PE

Product Codes and Dimensions (mm)

Product Code	D1	D2	D3	D4	D5	A1	A2	L1	L2
27800	15	15.6	18	23	15	19	22	44.5	59
27801	22	22.8	25	31.3	22	20	23	57.5	71
27802	28	28.8	31	37.4	28	20	25	70	79.5
27803	35	35.7	38.3	44.7	35	28	25	81.5	92
27804	42	42.8	45.3	53.5	42	29	32	96	107.5
27805	54	54.8	57.3	65.3	54	34	37	123	133.5
27806	67	69.1	71.7	82.6	67	49	52	158	179
27807	76	78.6	81.1	94.4	76	49	54	184	201
27809	108	110.9	113.8	132.1	108	65	71	253	266